THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
CF	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	O	REL 95-3165-060-1	4-12-95	LM	CA
	A	ADDED -3,-4 0B20-0327-96	4-30-96	TS	GG
	B	REV PER 0B20-0909-96	10-11-96	TS	GG
	C	ADD -5 & -6 0B20-1153-96	12-6-96	TS	GG

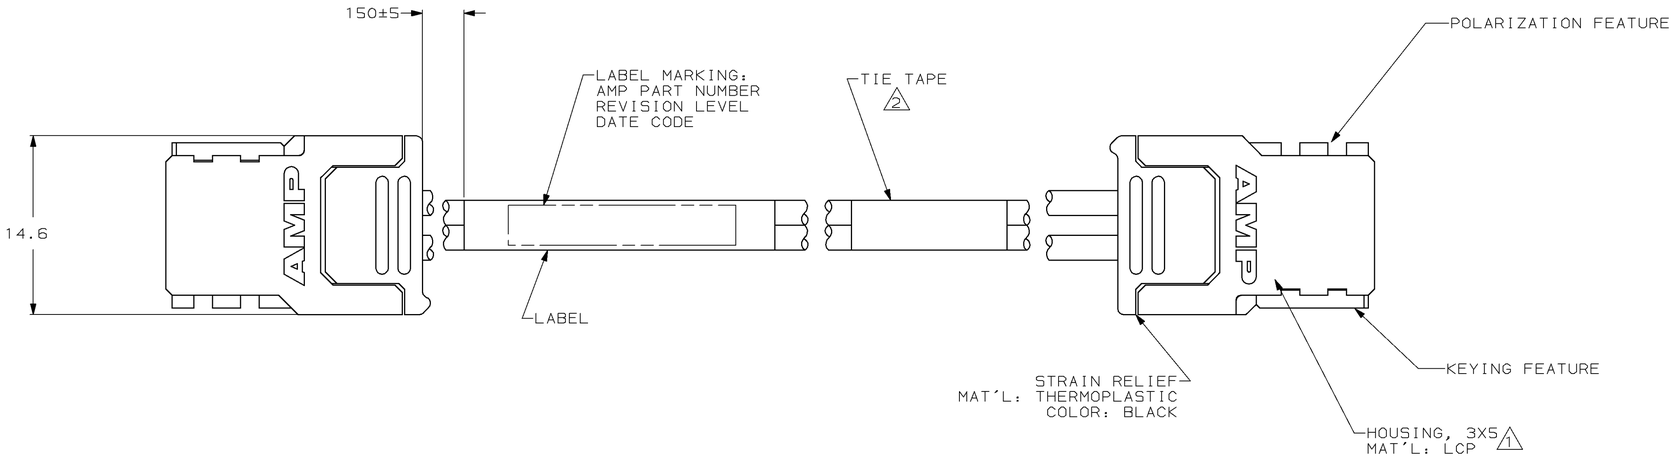

CONN 1

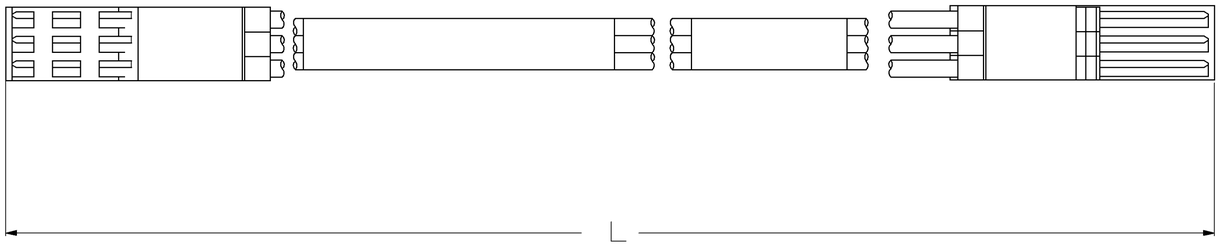

CONN 2

1. EACH HOUSING CONTAINS 5 SOCKET CONTACTS. CONTACTS ARE PLATED WITH .00038 MIN THICK GOLD OVER .00127 MIN THICK NICKEL.
2. ADDITIONAL TIE TAPE PLACED ON CABLE BUNDLE, SPACED EVERY 600 mm MAX.
3. MAXIMUM ALLOWABLE MATING POST LENGTH 8.5mm
4. CABLE : SIGNAL & DRAINS 28 AWG
   PROPAGATION DELAY 4.265 NS/METER NOM
   IMPEDANCE 100 OHMS DIFFERENTIAL NOM
   SHIELD ALUMINIZED MYLAR
   JACKET PVC - UL RECOGNITION

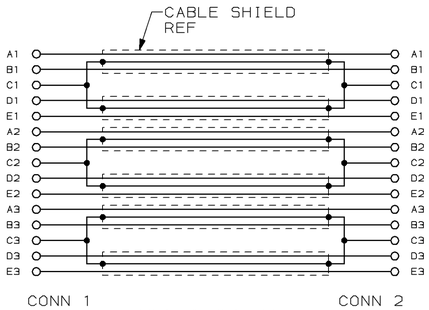

WIRING DIAGRAM

DIM L	PART NUMBER
10000.0±125	621409-6
5000.0±75	621409-5
2000.0±25	621409-4
1000.0±13	621409-3
1500.0±25	621409-2
3000.0±50	621409-1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN L. MORNINGSTAR 4-12-95
CHK C. ADAMS 4-12-95
APVD C. ADAMS 4-12-95
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

AMP Incorporated
Harrisburg, PA 17105-3608

NAME: CABLE ASSEMBLY, 3 x 5, 100 OHM, 2mm HM

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-621409

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV C