



# Data Flow

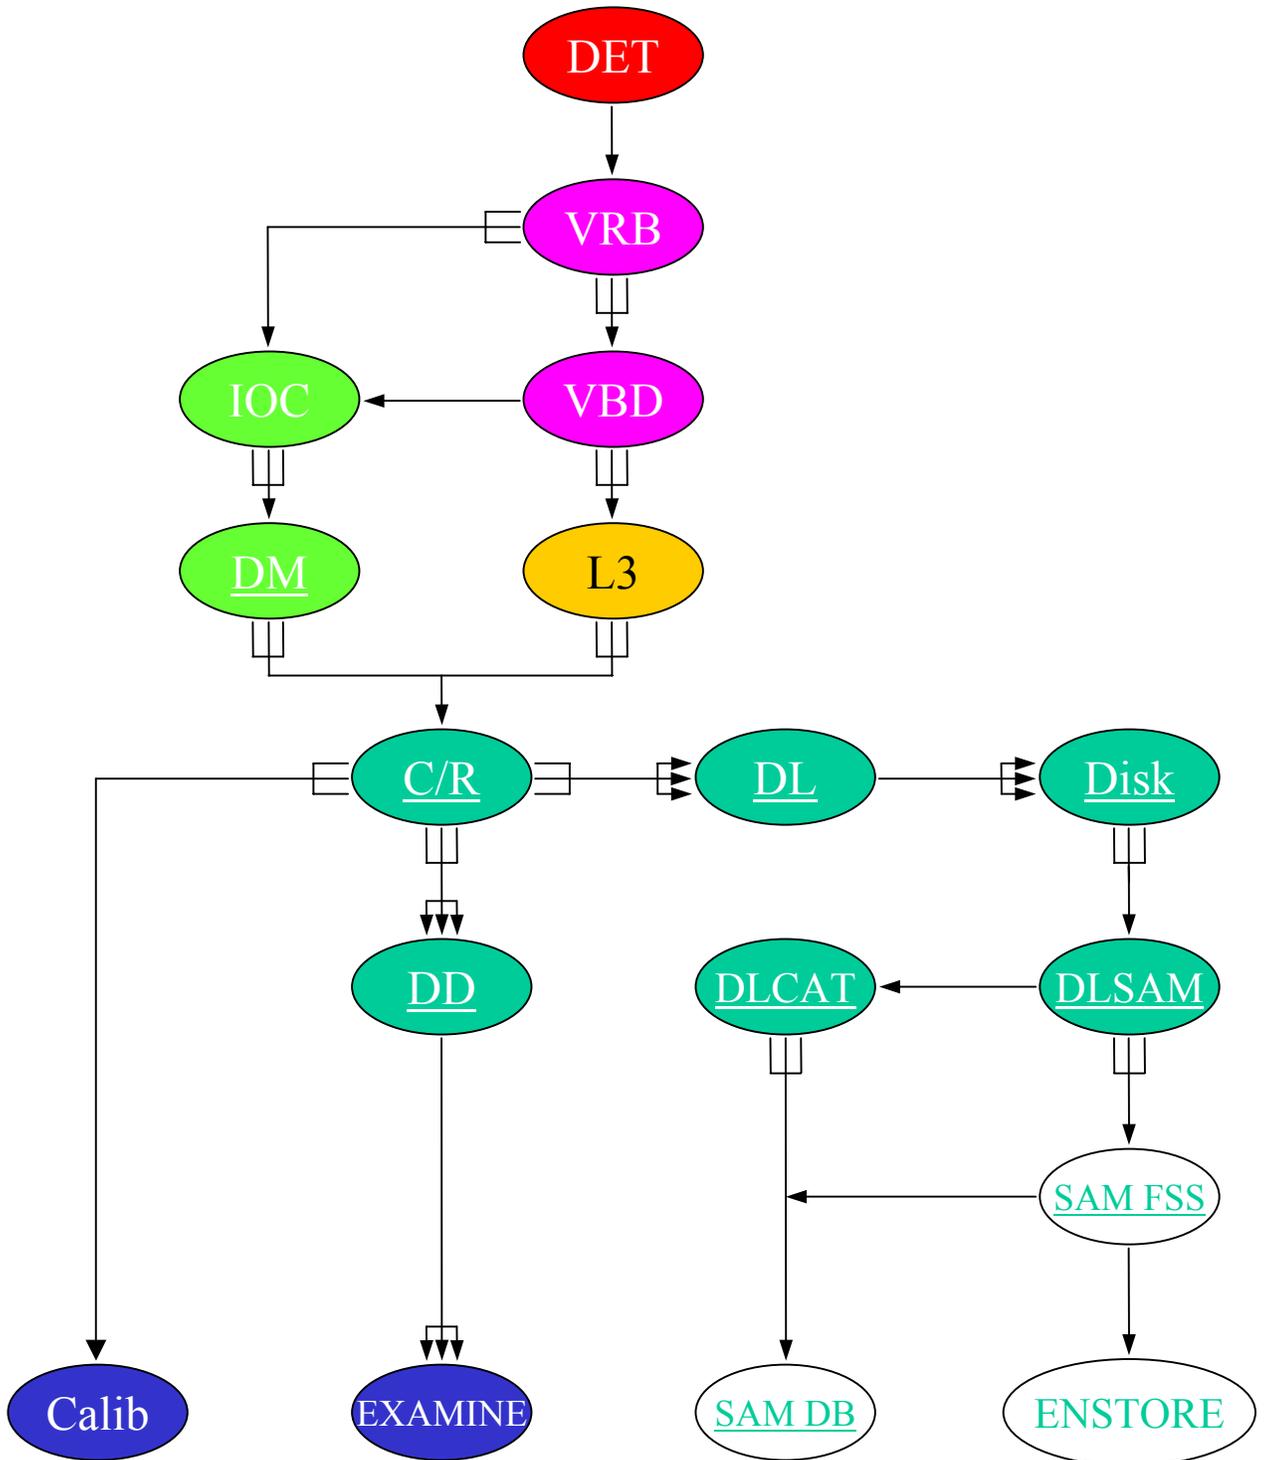

# Control Path

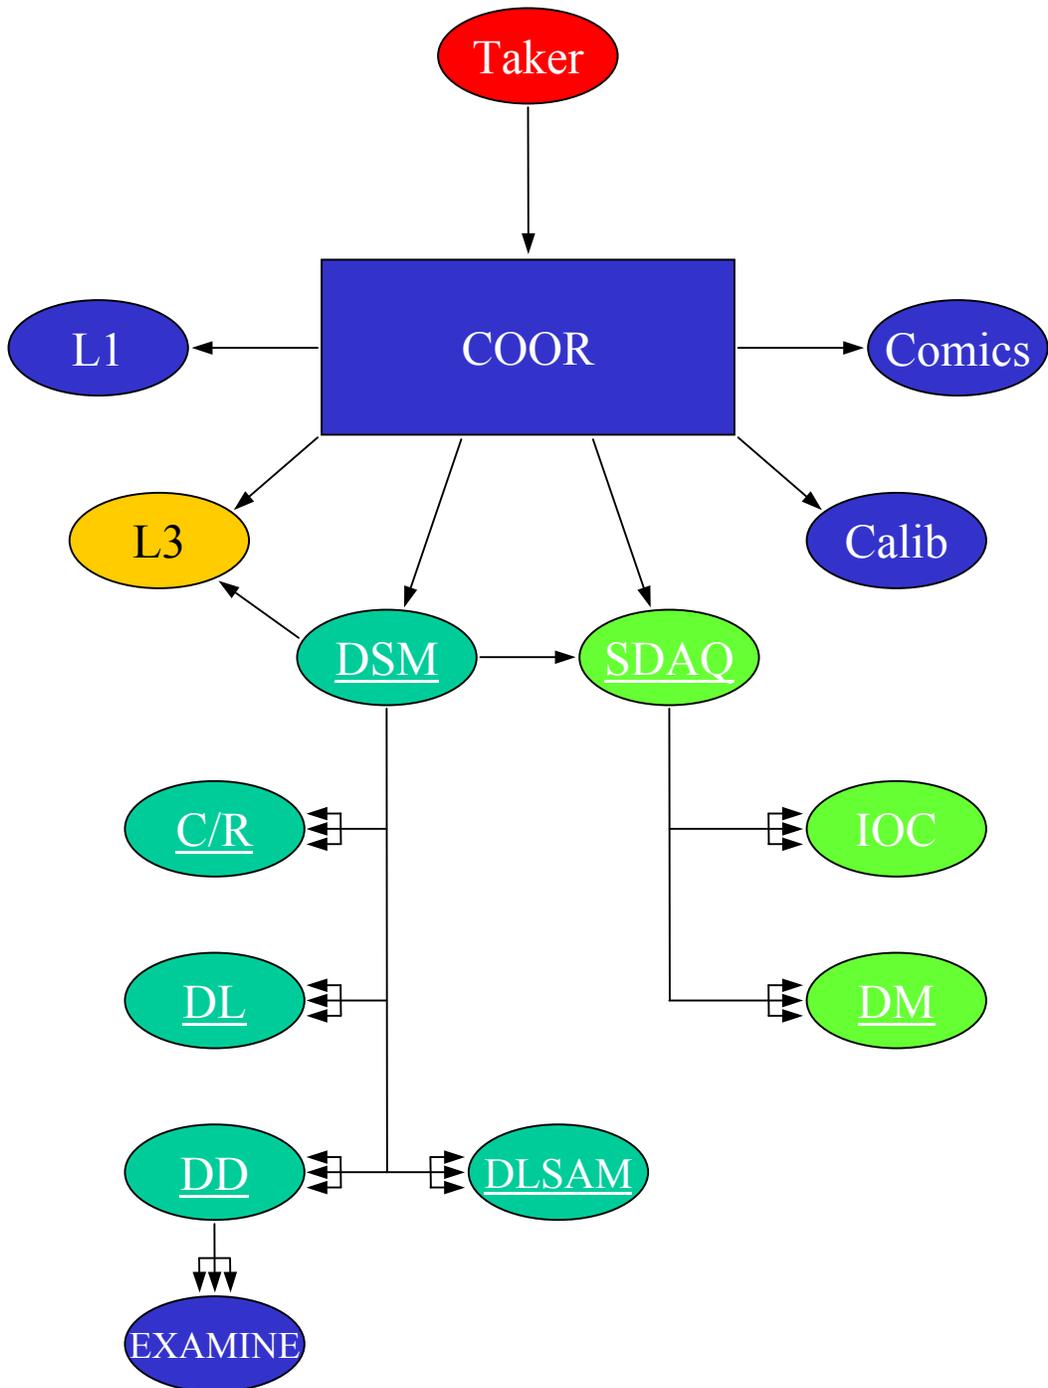

# Config & log files

- `/online/data/datapath/d0olc/sdaq.setup`
- `/online/log/sdaq/200y/mm`  
`/online/log/dm/200y/mm`

for all log files. Here `200y` is the 4-digit year, `mm` the 2-digit month.

Occasionally if the supervisor did not start properly, some trace information may be found in the standard output file:

`/online/log/sdaq/out.X`

Here `X` is a time stamp like `20010524-082557CDT`.

# Start up & stop

Before attempting to start or stop the supervisor, always check to see whether it is already/still running by:

```
ps -u d0run | grep sdaq
```

- Start up

Log into the “d0run” account on d0olc, then:

1. `setup d0online`
2. `start_daq sdaq`      or  
    `start_sdaq d0olc`

- Stop

Log into the “d0run” account on d0olc, then:

1. `setup d0online`
2. `stop_daq sdaq`      or  
    `stop_sdaq d0olc`      or  
    `kill -9 ***`

Please allow a few seconds for the commands to finish.

# Monitoring & Trouble-shooting

- `coormon` for SDAQ alive or not
- `SES display` for error messages